

YAMAHA WR250/450 TRAIL 2003-2006

IMPORTANT!


Pre-fitting Instructions for Safari Fuel Tanks

1. Rinse tank out with a small amount of petrol and then discard the petrol. This needs to be done to remove any plastic trimmings that may be left in the tank after manufacturing.
2. Before attaching the screws and bolts to the brass inserts, insure that an anti-seize compound – grease will do – is applied to the threads. **Do not use thread retaining compounds.** If there is a risk of the screws and bolts working loose, drill the heads and use lock wire to secure them – mainly for endurance competition events.
3. Position the fuel line so that it runs neatly and does not protrude or kink. Position the fuel line clamps and check for leaks.

Fitting Instructions

- 1) Drain the fuel from the standard fuel tank.
- 2) Remove the seat, standard tank and radiator shrouds.
- 3) Remove the tank mounts from the stock tank and fit them to the new tank.
- 4) Remove the rubber strap screw from the standard tank and fit it to the new tank.
- 5) Remove front seat locator from the stock tank and fit it to the new tank – see diagram for 03/04 and 05/06 positions.
- 6) Remove the fuel tap from the standard tank and fit it to the new tank.
- 7) Fit the new tank to the bike using standard mounting bolts, fit the rear strap, and attach the standard fuel lines.
- 8) Fit the seat.
- 9) Add a small amount of fuel then CHECK THE ENTIRE SYSTEM FOR LEAKS!

05/06 Seat Insert

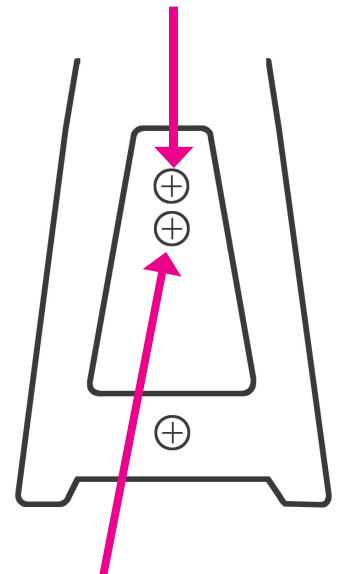

03/04 Seat Insert